


Sidewalk Inspection Form  
City of North Olmsted

Location		Munis #	
Property Owner			
Inspector	Will Klotzbach (P: 440-716-4117)	Date	

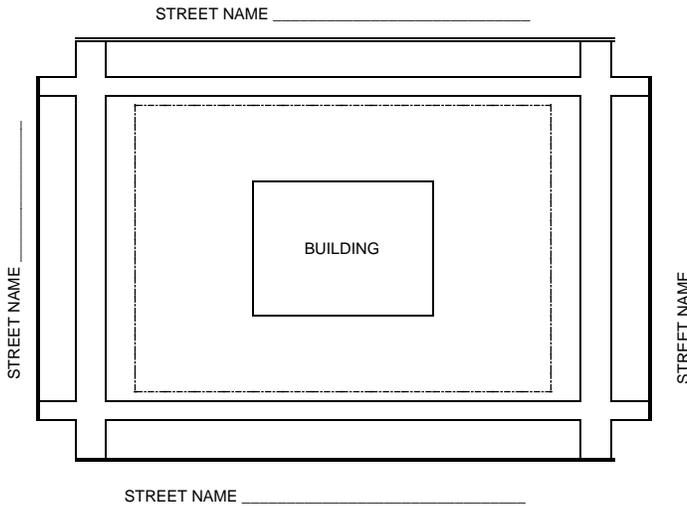

Field Notes:

---

---

---

---

---

---

---

---

---

---

---

---

ID	Figure	Description	Repair Options	# Squares			Inspect
				4"	6"	8"	
A		Vertical flaw of 1" at joint, 3" at tree roots, or slope exceeding 1" per foot	1. Replacement 2. Jack or Lift 3. Grinding				Pre
							Final
B		Horizontal gap or crack 1" or more	1. Replacement				Pre
							Final
C		Instability, structural damage, pitting, scaling, spalling, or deterioration.	1. Replacement				Pre
							Final
D		Does not meet minimum 5' width	1. Replacement				Pre
							Final

Notes:

1. Property owners are responsible for the repair and maintenance of sidewalks per NOCO 521 & 903, and ORC 729.
2. Sidewalks shall be a minimum 4" thick, except a minimum 6" thick crossing residential driveways, and a minimum 8" thick crossing commercial driveways.
3. Although existing sidewalk joint and width dimensions may vary, a typical sidewalk square will be considered an average 5'x5' for the purpose of the city calculating quantities and replacement costs.
4. Property owners may select the repair option of their choice if performing the required work themselves or hiring their own contractor within the required timeframe, however the contractor hired by the city will only perform slab replacement.
5. For additional information, please visit website at: [www.north-olmsted.com/engineering-department](http://www.north-olmsted.com/engineering-department)